

# N1000A DCA-X

## Wide Bandwidth Oscilloscope Mainframe and Modules

### Introduction

The N1000A DCA-X performs precision measurements on high speed digital designs from 50 MBd to more than 80 GBd on up to 16 channels simultaneously. Applications include optical transceiver design and production test, electrical ASIC/FPGA/IC design and characterization, serial bus characterization, and measurements and trouble-shooting via TDR/TDT and S-parameter measurements of channels, cables and PCBs.

The N1000A user interface and operating system is identical to the FlexDCA interface of the DCA-M modules (over a simple USB 2.0 or 3.0 connection) and N1010A FlexDCA on a PC.



# Table of Contents

Introduction .....	1
Digital Communication Analyzer Solutions .....	3
N1000A DCA-X Specifications .....	4
Module Selection Guides .....	12
Module SIRC Filters .....	14
Module Specifications .....	16
Modules no longer available but supported by the N1000A DCA-X Mainframe .....	40
Ordering Information .....	41
Warranty Options (for All Products) .....	49
Accessories .....	49
Connectivity Solutions .....	49

# Digital Communication Analyzer Solutions

Keysight offers complete Digital Communication Analyzer solutions that can be combined with or used alongside the DCA-X, including clock recovery, stand-alone Digital Communication Analyzers (DCA-M) and software. For complete information on Keysight's entire DCA family, please refer to these other helpful documents:

- Keysight DCA Wide Bandwidth Oscilloscope Family Brochure (5992-3301EN)
- Keysight DCA Family FlexDCA Sampling Oscilloscope Software Technical Overview (5992-3319EN)
- Keysight N1000A DCA Wide Bandwidth Oscilloscope Family Configuration Guide (5992-3372EN)
- Keysight DCA Family Clock Data Recovery Solutions Data Sheet (5991-1620EN)
- Keysight N1090A (5992-3655EN), N1092A/B/C/D/E (5992-3886EN), and N1094A/B (5992-3700EN) DCA-M Optical and Electrical Sampling Oscilloscope Data Sheets.



Optical + Electrical and  
Electrical Clock Recovery



Optical + Electrical DCA-M



FlexDCA Software

# N1000A DCA-X Specifications

## General notes

NOTE: All specifications describe warranted performance over the temperature range +10°C to +40°C (unless otherwise noted). The specifications are applicable after the temperature is stabilized, which occurs after 1 hour of continuous operation in final setup configuration and while self calibration is valid. Many performance parameters are enhanced through frequent, simple user calibrations.



NOTE: Specifications describe warranted performance. Characteristics provide useful, nonwarranted information about the functions and performance of the instrument. Characteristics are printed in *green italics*.

NOTE: Factory Calibration Cycle. For optimum performance, the instrument should have a complete verification of specifications once every 12 months.

NOTE: Nominal Value indicates the expected, but not warranted, value of the parameter.

## N1000A computer system and storage specifications

Item	Description
CPU	Intel I5 Quad Core
RAM	8 GB
Operating System	Windows 10, 64 bit
Mass Storage	240 GB (minimum) internal SSD hard disk

## N1000A display specifications

Item	Description
Display Area	210.4 mm x 157.8 mm 10.4 inch diagonal color active matrix LCD module incorporating amorphous silicon TFTs.
Entire Display Resolution	1024 pixels horizontally x 768 pixels vertically
Waveform Colors	Select from over 16 colors. User may change color assignment of all traces (channels, waveform memory, and signal processing functions).
Persistence Modes	Gray scale, color grade, infinite, variable
Connect-the-dots	On/Off selectable
Persistence	Minimum, variable (100 ms to 40s), infinite
Graticule	On/Off
Grid Intensity	0 to 100%
Dialog Boxes	Opaque or transparent
Supports External Display	Supports multiple display configurations via Windows display utility.

## N1000A environmental specifications

Item	Description
Use	indoor
<b>Temperature</b>	
Operating	10 °C to +40 °C (50 °F to +104 °F)
Non-operating	-40 °C to +70 °C (-40 °F to +158 °F)
Altitude (Operating)	Up to 4,600 meters (15,000 ft)
Humidity <sup>1</sup>	Type tested at 95%, +40 °C (non-condensing)
<b>Weight</b>	
Mainframe without modules (characteristic)	20.5 kg (43 lb)
Module (characteristic)	1.2 kg (2.6 lb)
<b>Dimensions (excluding handle)</b>	
Without front connectors and rear feet	221 mm H x 426 mm W x 530 mm D (8.7 inch x 16.76 inch x 20.9 inch)
With front connectors and rear feet	234 mm H x 426 mm W x 601 mm D (9.23 inch x 16.76 inch x 23.67 inch)
With front cover and rear feet	234 mm H x 426 mm W x 612 mm D (9.23 inch x 16.76 inch x 24.1 inch)

1. Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

## N1000A LINE power specifications

Item	Description
Line Power	100/120 Vac, 50/60/400 Hz
	220/240 Vac, 50/60 Hz
Power in Watts	700 Watts Maximum
The products can operate with mains supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage.	

## N1000A horizontal (timebase) specifications

Item	Description
<b>Scale Factor</b>	
<b>Full scale is ten divisions.</b>	
Minimum	100 fs/div
Maximum	50 ms/div
<b>Delay</b>	
<b>Time offset relative to the front panel trigger input on the instrument mainframe.</b>	
Minimum	16 ns
Maximum	1s
Time Interval Accuracy	1 ps + 1% of $\Delta$ time interval for intervals from minimum delay to minimum delay + 1 ns <sup>1</sup> , or 6 ps + 1% of $\Delta$ time interval <sup>1</sup> <i>500 fs + 0.25% of <math>\Delta</math> time interval (characteristic) <sup>2</sup></i>
Time Interval Accuracy (Pattern Lock Mode)	1 GHz to 32 GHz: 500 fs + 0.5% of 1 / (clock input frequency), or 5 ps (whichever is smaller) <sup>1</sup> 50 MHz to 1 GHz: 500 fs + 0.5% of 1 / (clock input frequency), or 30 ps (whichever is smaller) <sup>1</sup> <i>250 fs + 0.25% of 1 / (clock input frequency) (characteristic) <sup>2</sup></i>
Jitter Mode Operation	<i>Time interval accuracy – jitter mode operation 500 fs (characteristic)</i> . Test configuration: PRBS of length $2^7-1$ bits, Data and Clock 10 Gb/s.
Time Interval Resolution <sup>3</sup>	<i>screen diameter / record length or 60 fs, whichever is larger</i>
Display Units	Unit Interval or Time
Record length <sup>4</sup>	16 to 131,072 without pattern lock, 1 to 268,435,456 with pattern lock and "Acquire Entire Pattern"

1. Dual marker measurement performed at a temperature within  $\pm 5$  °C of horizontal calibration temperature.
2. Dual marker measurement performed at a temperature within  $\pm 1.5$  °C of horizontal calibration temperature.
3. The time interval resolution is the smallest time you can characterize between two points.
4. Maximum number of samples depends on pattern, number of active channels, available memory, pattern lock enabled, and *Acquire Entire Pattern* enabled.

## N1000A front-panel inputs and outputs opecifications

Item	Description
Trigger Input, Connector	2.92 mm (male) Mainframe ships with 2.92 mm female-female connector saver (P/N 1250-4105)
Trigger Input, Impedance (Normalized)	50 $\Omega$
Trigger Input, Maximum	2 Vpp maximum
Precision Timebase Input, Connector (Option N1000A-PTB only)	2.92 mm (male) Mainframe ships with 2.92 mm female-female connector saver (P/N 1250-4105).
Precision Timebase Input, Impedance (Normalized) (Option N1000A-PTB only)	50 $\Omega$
Precision Timebase Input, Maximum (Option N1000A-PTB only)	1.3 Vpp maximum
DC Cal Output	BNC (female) Range: -2.0 V to +2.0 V
USB	Three USB 2.0 ports
Ground Connection	Banana plug

## N1000A rear-panel inputs and outputs specifications

Item	Description
GPIB	Fully programmable, complies with IEEE 488.2
Display Port	For connecting external displays
VGA Port	Analog, full color, 15 pin D-sub (female)
LAN	Two Gigabit Ethernet ports
USB	Two USB 3.0 ports Two USB 2.0 ports
USB Device Port	Instrument control over USB

## N1000A internal precision timebase specifications (Option PTB)

The *N1000A Internal Precision Timebase Specifications* are for Option PTB, which is the N1000A internal precision timebase. These specifications refer to the signal input to the front-panel Precision Timebase Input connector.

NOTE: If Freerun trigger mode is *not* used, a trigger input *must* also be supplied. This is in addition to the reference clock input to the front-panel Precision Timebase connector. The trigger input must be synchronous to the reference clock but may be a sub-rate of the clock based on the required frequency range for the trigger input.

Item	Description
Maximum Input Signal	1.3 Vpp
Input DC Offset Range	± 200 mV
<b>Input Signal Type</b> The internal precision timebase works with typical digital clock signals, such as a BERT output, as well as sine waves. If the rise time or fall time of the clock signal is less than 15% of the period of the clock (for example, less than 15 ps for a 10 GHz clock), reduce the edge speed by using an external low-pass filter or length of cable. For the lowest jitter, use a signal that is as close as possible to the maximum signal amplitude (1.3 Vpp) and minimize any sub-harmonics.	
<b>Jitter (Input ≥ 750 mVpp, sinusoidal) (Characteristic)</b>	
2.4 GHz to < 4.0 GHz trigger (tested at 2.4 GHz, 750 mVpp)	≤ 200 fs rms < 400 fs rms, with 54XXX, 8348X, or N1045A (non Option LOJ) module
4 GHz to 9.0 GHz trigger (tested at 5 GHz, 750 mVpp)	≤ 120 fs rms < 400 fs rms, with 54XXX, 8348X, or N1045A (non Option LOJ) module
> 9.0 GHz to 44.0 GHz trigger (tested at 10, 20, and 40 GHz, 500 mVpp)	≤ 90 fs rms < 200 fs rms, with 54XXX, 8348X, or N1045A (non Option LOJ) module
<b>Precision Timebase Input</b>	
Nominal Impedance	50 Ω
Connector Type	2.92 mm (male)

## N1000A general trigger specifications

Item	Description
Maximum Trigger Signal	2 V peak-to-peak
<b>Trigger Input</b>	
Nominal Impedance	50 $\Omega$
Reflection	10% for 100 ps rise time
Connector Type	2.92 mm (male)

## N1000A internal trigger mode specifications

Item	Description
Freerun	Freerun trigger mode internally generates an asynchronous trigger that allows viewing the sampled signal amplitude without an external trigger signal but provides no timing information. Freerun is useful in troubleshooting external trigger problems.

## N1000A clock trigger / pattern lock mode specifications

Item	Description <sup>1</sup>
Clock Trigger	50 MHz to 32 GHz, effective divide-by-one, AC coupled
Pattern Lock (Option PLK)	50 MHz to 32 GHz, AC coupled
Pattern Lock Length (Option PLK)	1 to 2 <sup>23</sup> (8,388,608) symbols
<b>Jitter</b>	
50 MHz to < 500 MHz	1.0 ps rms + 10 PPM of horizontal position (maximum) < 800 fs rms + 5 PPM of horizontal position (typical)
500 MHz to 32 GHz <sup>2,3</sup> (Option STB)	450 fs rms (maximum) 400 fs rms (typical)
500 MHz to 32 GHz <sup>2,3</sup> (Option LOJ)	250 fs rms (maximum) 200 fs rms (typical)
Trigger Sensitivity	200 mV p-p
Trigger Slew rate	$\geq 2$ V/ns

1. These specifications refer to the signal input to the front-panel Trigger Input connector. The sampled input signal timing is recreated by using an externally supplied trigger signal that is synchronous with the sampled signal input.
2. Verified at 10 GHz with a clock and signal slew rate  $\geq 15$  V/ns.
3. Verified at 28 GHz with a clock and signal slew rate  $\geq 20$  V/ns.

## N1000A edge trigger mode specifications

Item	Description <sup>1</sup>
Input	DC to 2.5 GHz
Jitter <sup>2</sup>	1.0 ps rms + 10 PPM horizontal position (maximum) < 800 fs rms + 5 PPM horizontal position (characteristic)
Trigger Sensitivity	200 mV p-p (sinusoidal input or 200 ps minimum pulse width)
Triggering Level Adjustment	-1 V to +1 V
Edge Select	Positive or negative

1. These specifications refer to the signal input to the front-panel Trigger Input connector. The sampled input signal timing is recreated by using an externally supplied trigger signal that is synchronous with the sampled signal input.
2. Verified at 2.5 GHz with a clock and signal slew rate  $\geq 2$  V/ns.

## N1000A vertical (channel) specifications

Item	Description
Sample Rate	Up to 250 kHz
Number of Channels	Up to 16 channels
Vertical Resolution	16 bit hardware A/D converter for N10xx-series modules. 14 bit hardware A/D converter for 861xx, 54xxx, and 8348x-series modules.
Full Resolution Channel Scales	Adjusts in a 1-2-5-10 sequence for coarse adjustment or fine adjustment resolution from the front panel knob.
Adjustments	Scale, offset, activate filter, sampler bandwidth, attenuation factor, transducer conversion factors

# Module Selection Guides

## Optical / electrical modules

Module	Option	No. of electrical channels	Highest electrical bandwidth (GHz)	No. of optical channels	Wavelength range (nm)	Unfiltered optical bandwidth (GHz)	Fiber input (μm)
N1030A		0		1	1250 - 1600	65	9/125
	EC1	1	95	1	1250 - 1600	65	9/125
N1030B		0		2	1250 - 1600	65	9/125
N1032A	09U	0		1	1250 - 1625	90	9/125
	13U	0		1	1250 - 1625	110 120 ( <i>characteristic</i> )	9/125
N1032B	09U	0		2	1250 - 1625	90	9/125
	13U	0		2	1250 - 1625	110 120 ( <i>characteristic</i> )	9/125

## Available optical reference filter rates for optical modules (NRZ)

Module	20 Gb/s to 28 Gb/s	49.77 Gb/s <sup>1</sup> (37.3 GHz)	106.25 Gb/s (53.125 GHz)
N1030A	•	•	
N1030B	•	•	
N1032A			•
N1032B			•

1. With option 490.

## Available optical reference filter rates for optical modules (PAM4)

Module	26 Gb/s <sup>1</sup>	49.7664 Gb/s (37.3248 GHz)	53 Gb/s <sup>1</sup>	106.25 Gb/s (53.125 GHz)	112.5 Gb/s (56.25 GHz)
N1030A	•		•		
N1030B	•		•		
N1032A		•		•	•
N1032B		•		•	•

1. Only available with option IRC.

## Electrical modules

Module	Option	No. of electrical channels	Highest Electrical bandwidth (GHz)	Step Generator (TDR)
N1040A	033	2	33	
	060	2	60	
N1045B	02x	2	60	
	04x	4	60	
N1046A	71F	1	75	
	72F	2	75	
	74F	4	75	
	81F	1	85	
	82F	2	85	
	84F	4	85	
	11F	1	100	
	12F	2	100	
N1055A	32x	2	35	2
	34x	4	35	4
	52x	2	50	2
	54x	4	50	4
N1060A	050	2	50	
	085	2	85	

# Module SIRC Filters

System Impulse Response Correction (SIRC) filters provide channel SIRC measurement and data files to give an ideal channel response. SIRC data can be applied in FlexDCA's System Impulse Response Correction dialog. The SIRC correction data feature is a digital filter that is used to:

- Improve the response of module reference filters to more closely match an ideal receiver.
- Enable non-standard reference receiver rates or bandwidths.
- Increase the bandwidth of the channel by up to 50%.
- Ensures that an eye diagram will look identical between different modules.

SIRC correction data is unique to a specific 86116C serial number. The data can be purchased with new modules or purchased as an upgrade for your existing modules. Purchasing data for an existing module requires that the module be returned to Keysight Technologies. To order SIRC data, contact your Keysight representative or visit <http://www.keysight.com/Find/FlexDCA>.

NOTE: The SIRC filter ranges shown in the following tables are only available with option IRC and compliance is not guaranteed.

## N1030A/B SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1030A Option 560	All Optical	21.5 GBd (16.13 GHz)	80 GBd (60 GHz)
N1030A Options 280 <i>and</i> 560	All Optical	15.6 GBd (11.7 GHz)	80 GBd (60 GHz)
N1030A Option EC1	Electrical	20 GHz	127 GHz

1. Only available with option IRC and compliance not guaranteed.

## N1032A/B SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1032A/B Option 09U, 13U, IRC	All	33.3 GHz dBo (25 GHz dBe)	90 GHz dBo (67.5 GHz dBe)
N1032A/B Options 09U, 112, IRC	All	33.3 GHz dBo (25 GHz dBe)	106.25 GHz dBo (79.68 GHz dBe)
N1032A/B Options 09U, 13U, 112, IRC	All	33.3 GHz dBo (25 GHz dBe)	130 GHz dBo (97.5 GHz dBe)

1. Only available with option IRC and compliance not guaranteed.

## N1040A SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1040A Option 033	All	10 GHz	38 GHz
N1040A Option 060	All	10 GHz	70 GHz

1. Only available with option IRC and compliance not guaranteed.

## N1045B SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1045B	All	10 GHz	70 GHz

1. Only available with option IRC and compliance not guaranteed.

## N1046A SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1046A Option 1xF	All	22.5 GHz	130 GHz
N1046A Option 7xF	All	22.5 GHz	80 GHz
N1046A Option 8xF	All	22.5 GHz	90 GHz

1. Only available with option IRC and compliance not guaranteed.

## N1060A SIRC filter ranges

Module/Option	Channel	Range <sup>1</sup> Min SIRC Freq.	Range <sup>1</sup> Max SIRC Freq.
N1060A Option 050	All	25 GHz	60 GHz
N1060A Option 085	All	25 GHz	100 GHz
N1060A Option E33, 050	All	16.5 GHz	60 GHz
N1060A Option E33, 085	All	16.5 GHz	100 GHz

1. Only available with option IRC and compliance not guaranteed.

# Module Specifications

NOTE: All specifications describe warranted performance over the temperature range +10°C to +40°C (unless otherwise noted). The specifications are applicable after the temperature is stabilized, which occurs after 1 hour of continuous operation in final setup configuration and while self calibration is valid. Many performance parameters are enhanced through frequent, simple user calibrations.

NOTE: Specifications describe warranted performance. Characteristics provide useful, nonwarranted information about the functions and performance of the instrument. Characteristics are printed in *green italics*.

NOTE: Factory Calibration Cycle. For optimum performance, the instrument should have a complete verification of specifications once every 12 months.

NOTE: Nominal Value indicates the expected, but not warranted, value of the parameter.

# N1030A/B module specifications



## N1030A/B optical channel specifications

Item	Description	
Optical Channel Count	1 (N1030A) 2 (N1030B)	
Optical Channel Bandwidth, -3 dB	65 GHz ( <i>characteristic</i> ) <sup>1</sup> 60 GHz <sup>2</sup>	
Nominal Wavelength Range	1250 nm to 1600 nm	
Factory calibrated wavelengths <sup>3</sup>	1310 nm (± 20 nm) 1550 nm (± 20 nm)	
User calibration wavelength range	1250 nm to 1600 nm	
<b>Reference receiver filters<sup>4</sup></b>		
25 Gb/s Ethernet (25.78125 Gb/s) 400GBASE-SR16 (26.5625 Gb/s) Ethernet OTU4 FEC/ITU-T G.959.1 (27.952493 Gb/s) 32G Fibre Channel (28.05 Gb/s) 49.77 Gbaud NRZ ITU-T 50G-PON (37.3 GHz) - Option 490 53.125 GBaud PAM4 TDECQ (26.6 GHz) 53.125 GBaud NRZ (39.8 GHz)		
<b>RMS Noise (<i>Characteristic</i>)</b>		
	<b>1310 nm</b>	<b>1550 nm</b>
25 Gb/s Ethernet (25.78125 Gb/s)	16 $\mu$ W	18 $\mu$ W
400GBASE-SR16 (26.5625 Gb/s)	16 $\mu$ W	18 $\mu$ W
Ethernet OTU4 FEC/ITU-T G.959.1 (27.952493 Gb/s)	16 $\mu$ W	18 $\mu$ W
32G Fibre Channel (28.05 Gb/s)	16 $\mu$ W	18 $\mu$ W
53.125 GBaud PAM4 TDECQ (26.6 GHz)	18 $\mu$ W	22 $\mu$ W
53.125 GBaud NRZ (39.8 GHz)	30 $\mu$ W	35 $\mu$ W
Unfiltered (60 GHz)	35 $\mu$ W	45 $\mu$ W
Unfiltered (65 GHz)	80 $\mu$ W	95 $\mu$ W
<b>RMS Noise (<i>Maximum</i>)</b>		
	<b>1310 nm</b>	<b>1550 nm</b>
25 Gb/s Ethernet (25.78125 Gb/s)	20 $\mu$ W	25 $\mu$ W
400GBASE-SR16 (26.5625 Gb/s)	20 $\mu$ W	25 $\mu$ W
Ethernet OTU4 FEC/ITU-T G.959.1 (27.952493 Gb/s)	20 $\mu$ W	25 $\mu$ W
32G Fibre Channel (28.05 Gb/s)	20 $\mu$ W	25 $\mu$ W
49.77 GBaud NRZ ITU-T G.hsp (PON)	40 $\mu$ W	55 $\mu$ W
53.125 GBaud PAM4 TDECQ (26.6 GHz)	30 $\mu$ W	35 $\mu$ W
53.125 GBaud NRZ (39.8 GHz)	40 $\mu$ W	55 $\mu$ W
Unfiltered (60 GHz)	50 $\mu$ W	65 $\mu$ W
Unfiltered (65 GHz)	105 $\mu$ W	110 $\mu$ W

Optical Sensitivity (Characteristic) <sup>5</sup>		1310 nm	1550 nm
25 Gb/s Ethernet (25.78125 Gb/s)		-6.5 dBm	-6.0 dBm
400GBASE-SR16 (26.5625 Gb/s)		-6.5 dBm	-6.0 dBm
Ethernet OTU4 FEC/ITU-T G.959.1 (27.952493 Gb/s)		-6.5 dBm	-6.0 dBm
32G Fibre Channel (28.05 Gb/s)		-6.5 dBm	-6.0 dBm
Scale Factor Specifications (per division, 8 divisions)		Description	
Minimum		5 $\mu$ W	
Maximum		500 $\mu$ W	
CW Offset Range <sup>6</sup>		+1.0 mW to -3 mW	
CW Accuracy (single mode) <sup>7</sup>		$\pm 15 \mu\text{W} \pm 1.5\%$ of reading $\pm$ connector uncertainty (Characteristic) $\pm 30 \mu\text{W} \pm 3\%$ of reading $\pm$ connector uncertainty	
Maximum Measureable Input Power		4 mW at 500 $\mu$ W/division scale factor	
Average Power Monitor Range		-30 dBm to +6 dBm (1310 nm) -30 dBm to +6 dBm (1550 nm)	
Average Power Monitor Accuracy <sup>8</sup>		Description	
For $1 \mu\text{W} \leq P_{\text{input}} \leq 2 \text{ mW}$		200 nW $\pm 5\%$ of reading $\pm$ connector uncertainty	
For $2 \text{ mW} \leq P_{\text{input}} \leq 4 \text{ mW}$		200 nW $\pm 10\%$ of reading - 100 $\mu$ W $\pm$ connector uncertainty	
Maximum Non-destruct Peak Power		5 mW (+7 dBm)	
Fiber Input		9/125 $\mu$ m	
Fiber Input Connector		FC	
Channel ADC		16 bits	

1. With the unfiltered setting selected, -3 dBo is calculated from the -6 dBe point.
2. Tuned to -3 dBo ( $\pm$  measurement uncertainty) at stated bandwidth(s).
3. For the average power monitor and the channel vertical path.
4. The frequency response is verified using an optical impulse (< 1 ps FWHM).
5. Generally represents the power level where an ideal eye diagram will approach 0% mask margin due to the noise of the oscilloscope. Provides a *non-specified* figure of merit to compare sensitivities of various optical channels. These values are calculated from the characteristic noise values.
6. Referenced two divisions from screen bottom.
7. Single marker, referenced to power sensor.
8. Average power monitor accuracy is tied to the calibration accuracy of the power sensor.

## N1030A (Option EC1) electrical channel specifications

Item	Description
Electrical Channel Count	1
Electrical Input Connectors	1 mm (m) bulkhead
Bandwidth, -3 dB (user selectable)	33, 40, 50, 70, 85, and 95 GHz <sup>1</sup>
Transition Time (10% to 90% calculated from TR = 0.35/BW)	
Description	
33 GHz BW	10.6 ps (Calculated)
40 GHz BW	8.8 ps (Calculated)
50 GHz BW	7.0 ps (Calculated)
70 GHz BW	5 ps (Calculated)
85 GHz BW	4.2 ps (Calculated)
95 GHz BW	3.7 ps (Calculated)
RMS Noise (Characteristic)	
Description	
33 GHz BW	350 $\mu$ V (Characteristic)
40 GHz BW	350 $\mu$ V (Characteristic)
50 GHz BW	450 $\mu$ V (Characteristic)
70 GHz BW	650 $\mu$ V (Characteristic)
85 GHz BW	950 $\mu$ V (Characteristic)
95 GHz BW	1150 $\mu$ V (Characteristic)
RMS Noise (Maximum)	
Description	
33 GHz BW	450 $\mu$ V
40 GHz BW	500 $\mu$ V
50 GHz BW	600 $\mu$ V
70 GHz BW	800 $\mu$ V
85 GHz BW	1200 $\mu$ V
95 GHz BW	1400 $\mu$ V
Scale Factor (per division)	
Description	
Minimum	1 mV/division
Maximum	100 mV/division
DC Accuracy ( $V_{AVG}$ Measurement) (at 33, 40, 50, 70, 85, 95 GHz BWs) <sup>2</sup>	
Description	
Specification	$\pm 2$ mV $\pm 4\%$ (reading - offset)
Characteristic	$\pm 2$ mV
DC Offset Range (referenced to center of screen)	$\pm 500$ mV
Input Dynamic Range (relative to channel offset)	$\pm 400$ mV
Maximum Input Signal	$\pm 2$ V (+16 dBm)

Maximum Sample Rate	Description
When used in an N1000A mainframe	250 kSa/s ( <i>Characteristic</i> )
When used in an 86100D mainframe	40 kSa/s ( <i>Characteristic</i> )
Nominal Input Impedance	50 $\Omega$

1. Tuned to be -3 dB ( $\pm$  measurement uncertainty) at stated bandwidth(s).
2. Specified at calibration temperature  $\pm$  0.5 °C. Perform a new module calibration if hardware skew has been applied.

# N1032A/B module specifications



## N1032A/B optical channel specifications

Item	Description	
Optical Channel Count	1 (N1032A) 2 (N1032B)	
<b>Optical Channel Bandwidth, -3 dBo <sup>1, 8</sup></b>		
	<b>Option 09U</b>	<b>Option 13U</b>
BW (unfiltered)	60 GHz	60 GHz
	80 GHz	80 GHz
	90 GHz	90 GHz
		110 GHz
		120 GHz (characteristic)
Nominal Wavelength Range	1250 nm to 1625 nm	
Factory calibrated wavelengths <sup>2</sup>	1310 nm ( $\pm 20$ nm) 1550 nm ( $\pm 20$ nm)	
User calibration wavelength range	1250 nm to 1625 nm	
<b>Hardware Reference Receiver Filters <sup>3</sup></b>		
	<b>Description (Option 112)</b>	
49.7664 GBd (37.3248 GHz, -3 dBe)	ITU-T PON	
106.25 GBd (53.125 GHz, -3 dBe)	IEEE 800GBASE TDECQ	
106.25 GBd (79.6875.25 GHz, -3 dBe)	NRZ Reference Filter	
112.5 GBd (56.25 GHz, -3 dBe)	4x200G-FR4 MSA Rev1	
<b>RMS Noise (Characteristic) <sup>7</sup></b>		
	<b>1310 nm</b>	<b>1550 nm</b>
49.7664 GBd (37.3248 GHz, -3 dBe)	40 $\mu$ W	75 $\mu$ W
106.25 GBd (53.125 GHz, -3 dBe)	60 $\mu$ W	105 $\mu$ W
106.25 GBd (79.6875.25 GHz, -3 dBe)	135 $\mu$ W	235 $\mu$ W
112.5 GBd (56.25 GHz, -3 dBe)	65 $\mu$ W	110 $\mu$ W
Unfiltered 60 GHz (-3 dBo)	45 $\mu$ W	80 $\mu$ W
Unfiltered 80 GHz (-3 dBo)	65 $\mu$ W	120 $\mu$ W
Unfiltered 90 GHz (-3 dBo)	90 $\mu$ W	155 $\mu$ W
Unfiltered 110 GHz (-3 dBo)	130 $\mu$ W	235 $\mu$ W
Unfiltered 120 GHz (-3 dBo)	175 $\mu$ W	300 $\mu$ W

RMS Noise (Maximum) <sup>7</sup>		1310 nm	1550 nm
49.7664 GBd (37.3248 GHz, -3 dBe)		50 $\mu$ W	85 $\mu$ W
106.25 GBd (53.125 GHz, -3 dBe)		70 $\mu$ W	120 $\mu$ W
106.25 GBd (79.6875.25 GHz, -3 dBe)		145 $\mu$ W	235 $\mu$ W
112.5 GBd (56.25 GHz, -3 dBe)		75 $\mu$ W	125 $\mu$ W
Unfiltered 60 GHz (-3 dBo)		55 $\mu$ W	90 $\mu$ W
Unfiltered 80 GHz (-3 dBo)		80 $\mu$ W	135 $\mu$ W
Unfiltered 90 GHz (-3 dBo)		105 $\mu$ W	165 $\mu$ W
Unfiltered 110 GHz (-3 dBo)		150 $\mu$ W	235 $\mu$ W
Unfiltered 120 GHz (-3 dBo)		185 $\mu$ W	315 $\mu$ W
Scale Factor Specifications (per division, 8 divisions)		Description	
Minimum		40 $\mu$ W	
Maximum		2 mW	
CW Offset Range <sup>4</sup>		+4 mW to -12 mW	
CW Accuracy (single mode, $P_{input} \leq 8$ mW) <sup>5,7</sup>		$\pm(50 \mu\text{W} + 2\% \text{ of reading}) \pm \text{connector uncertainty (1310 nm)}$ (Characteristic)	
		$\pm(300 \mu\text{W} + 4\% \text{ of reading}) \pm \text{connector uncertainty (1310 nm)}$	
		$\pm(100 \mu\text{W} + 3\% \text{ of reading}) \pm \text{connector uncertainty (1550 nm)}$ (Characteristic)	
		$\pm(300 \mu\text{W} + 7\% \text{ of reading}) \pm \text{connector uncertainty (1550 nm)}$	
Maximum Measurable Input Power		16 mW at 2 mW/division scale factor	
Average Power Monitor Range		Description	
1310 nm		-30 dBm to +9 dBm	
1310 nm (Characteristic)		-30 dBm to +12 dBm	
1550 nm		-30 dBm to +9 dBm	
1550 nm (Characteristic)		-30 dBm to +12 dBm	
Average Power Monitor Accuracy <sup>6,7</sup>		Description	
For $1 \mu\text{W} \leq P_{input} \leq 8$ mW		$\pm(200 \text{ nW} + 2\% \text{ of reading}) \pm \text{connector uncertainty (1310 nm)}$	
		$\pm(200 \text{ nW} + 3\% \text{ of reading}) \pm \text{connector uncertainty (1550 nm)}$	
For $50 \mu\text{W} \leq P_{input} \leq 8$ mW		$\pm(4\% \text{ of reading}) \pm \text{connector uncertainty (1310 nm)}$	
		$\pm(7\% \text{ of reading}) \pm \text{connector uncertainty (1550 nm)}$	
Maximum Non-destruct Peak Power		18 mW (+12.5 dBm)	
Fiber Input		9/125 $\mu$ m	
Fiber Input Connector		FC	
Channel ADC		16 bits	

N1032A/B Maximum Sampling Rate	Description
When used in an N1000A mainframe	<i>250 kSa/s (Characteristic)</i>
When used in an 86100D mainframe	<i>40 kSa/s (Characteristic)</i>

1. With the unfiltered setting selected, -3 dBo is calculated from the -6 dBe point.
2. For the average power monitor and the channel vertical path.
3. The frequency response is verified using a 1550 nm optical impulse (< 1 ps FWHM) at  $25 \pm 5$  °C.
4. Referenced two divisions from screen bottom.
5. Single marker, does not include optical power meter uncertainty.
6. Average power monitor accuracy does not include optical power meter uncertainty.
7. When within  $\pm 5$  °C of both the channel vertical calibration temperature and the channel optical calibration temperature. For optical channel calibration performed with  $2 \text{ mW} \pm 0.1 \text{ mW}$  at the specified wavelength.
8. Tuned to -3 dBo ( $\pm$  measurement uncertainty) at stated bandwidth(s).

# N1040A module specifications



## N1040A specifications

Item	Description
Electrical Channel Count	2
Electrical Input Connectors	2.92 mm (Option 033) 1.85 mm (Option 060)
<b>Bandwidth, 3 dB (user selectable) <sup>1</sup></b>	
	<b>Option 033</b>
	<b>Option 060</b>
	20 GHz
	33 GHz
	40 GHz
	60 GHz
<b>Transition Time (10% to 90% calculated from TR = 0.35/BW)</b>	
	<b>Option 033</b>
	<b>Option 060</b>
20 GHz BW	17.5 ps (Calculated)
33 GHz BW	10.6 ps (Calculated)
40 GHz BW	—
60 GHz BW	—
Channel-to-Channel Skew Range	± 100 ps
<b>RMS Noise</b>	
	<b>Option 033</b>
	<b>Option 060</b>
20 GHz BW	275 μV (Characteristic)
33 GHz BW	350 μV (Characteristic)
40 GHz BW	—
60 GHz BW	—
RMS Noise (Maximum)	500 μV
	800 μV
<b>Scale Factor (per division)</b>	
	<b>Description</b>
Minimum	1 mV/division
Maximum	100 mV/division
<b>DC Accuracy (V<sub>AVG</sub> Measurement) (at 20, 33, 40, 60 GHz BWs)<sup>2</sup></b>	
	<b>Description</b>
Specification	± 2 mV ± 4% of (reading – channel offset)
Characteristic	± 1.15 mV
DC Offset Range (referenced to center of screen)	± 500 mV
Input Dynamic Range (relative to channel offset)	± 400 mV
Maximum Input Signal	± 2V (+16 dBm)
<b>Maximum Sample Rate</b>	
	<b>Description</b>
When used in an 86100D mainframe	40 kSa/s (Characteristic)
When used in an N1000A mainframe	250 kSa/s (Characteristic)

Nominal Input Impedance	50 $\Omega$
Reflections (for 30 ps rise time)	20% ( <i>Characteristic</i> )

1. Tuned to be  $-3$  dB ( $\pm$  measurement uncertainty) at stated bandwidths.
2. Specified at calibration temperature  $\pm 0.5$  °C. Perform a new module calibration if hardware skew has been applied.

# N1045B module specifications



## N1045B specifications

Item	Description
<b>Electrical Input Channels (per option)</b>	
02F	2 Channel Remote Head with 1.85 mm (f) connectors.
02M	2 Channel Remote Head with 1.85 mm (m) connectors.
04F	4 Channel Remote Head with 1.85 mm (f) connectors.
04M	4 Channel Remote Head with 1.85 mm (m) connectors.
Remote Head Cable Length	The nominal length of the remote head cables is 1270 mm as measured from the module's front panel to the remote head's casing.
Bandwidth, 3 dB (user selectable)	20 GHz ( <i>Characteristic</i> ) 35 GHz ( <i>Characteristic</i> ) 45 GHz ( <i>Characteristic</i> ) 60 GHz
<b>Transition Time (10% to 90% calculated from TR = 0.35/BW)</b>	
20 GHz BW	17.5 ps ( <i>Calculated</i> )
35 GHz BW	10 ps ( <i>Calculated</i> )
45 GHz BW	7.8 ps ( <i>Calculated</i> )
60 GHz BW	5.8 ps ( <i>Calculated</i> )
Channel-to-Channel Skew Range	± 100 ps
<b>RMS Noise</b>	
20 GHz BW	310 μV ( <i>Characteristic</i> )
35 GHz BW	450 μV ( <i>Characteristic</i> )
45 GHz BW	530 μV ( <i>Characteristic</i> )
60 GHz BW	875 μV ( <i>Characteristic</i> )
RMS Noise ( <i>Maximum</i> )	975 μV (60 GHz BW setting)
<b>Scale Factor (per division)</b>	
Minimum	1 mV/division
Maximum	100 mV/division
<b>DC Accuracy (V<sub>AVG</sub> Measurement) <sup>1</sup></b>	
20, 35, 45, 60 GHz	± 1.15 mV ( <i>Characteristic</i> )
<b>DC Accuracy (V<sub>AVG</sub> Measurement) <sup>2</sup></b>	
20, 35, 45, 60 GHz	± 2 mV ± 4% of (reading – channel offset)
DC Offset Range (referenced to center of screen)	± 500 mV
Input Dynamic Range (relative to channel offset)	± 400 mV
Maximum Input Signal	± 2 V (+16 dBm)

Maximum Sample Rate	250 kSa/s (when used in N1000A Mainframe, Characteristic) 40 kSa/s (when used in 86100D Mainframe, Characteristic)
Nominal Input Impedance	50 $\Omega$ (Characteristic)
Reflections (for 30 ps rise time)	20% (Characteristic)

1. Specified at calibration temperature  $\pm 0.5$  °C. (Perform a new module calibration if hardware skew has been applied.)
2. Specified at calibration temperature  $\pm 5$  °C.

## Input Impedance (Graph of S11) , Characteristic

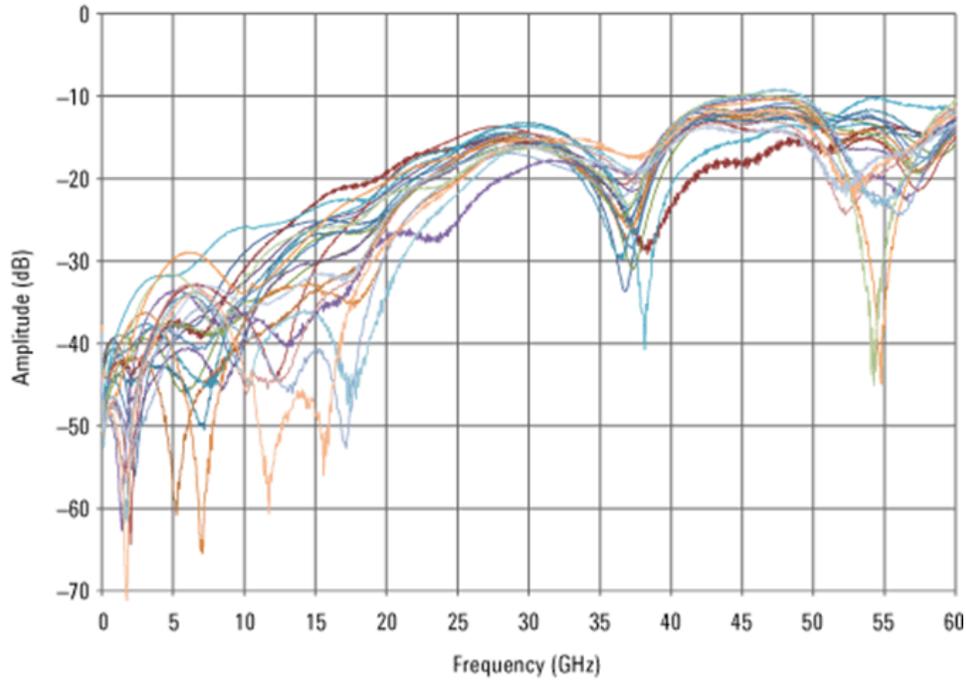


Figure 1. Graph of S11 (characteristic)

## N1046A module specifications



### N1046A maximum BW (1 Channel) per option specifications

Option	75 GHz	85 GHz	100 GHz
71F	•		
81F		•	
11F			•

### N1046A maximum BW (2 Channel) per option specifications

Option	75 GHz	85 GHz	100 GHz
72F	•		
82F		•	
12F			•

### N1046A maximum BW (4 Channel) per option specifications


Option	75 GHz	85 GHz	100 GHz
74F	•		
84F		•	
14F			•

# N1046A specifications

Item	Description		
<b>Bandwidth<sup>1</sup>, 3 dB (user selectable)</b>	<b>Options 71F, 72F, and 74F</b>	<b>Options 81F, 82F, and 84F</b>	<b>Options 11F, 12F, and 14F</b>
45 GHz	•	•	•
60 GHz	•	•	•
75 GHz	•	•	•
85 GHz		•	•
100 GHz			•
122 GHz ( <i>Characteristic</i> )			•
<b>Transition Time (10% to 90% calculated from <math>t_r = 0.35/BW</math>)</b>	<b>Options 71F, 72F, and 74F</b>	<b>Options 81F, 82F, and 84F</b>	<b>Options 11F, 12F, and 14F</b>
45 GHz	7.8 ps	7.8 ps	7.8 ps
60 GHz	5.9 ps	5.9 ps	5.9 ps
75 GHz	4.7 ps	4.7 ps	4.7 ps
85 GHz	—	4.2 ps	4.2 ps
100 GHz	—	—	3.5 ps
122 GHz ( <i>Characteristic</i> )	—	—	< 3.2 ps
Channel-to-Channel Skew Range	± 100 ps		
<b>RMS Noise</b>	<b>Options 71F, 72F, and 74F</b>	<b>Options 81F, 82F, and 84F</b>	<b>Options 11F, 12F, and 14F</b>
45 GHz	600 $\mu$ V 440 $\mu$ V ( <i>Characteristic</i> )	600 $\mu$ V 440 $\mu$ V ( <i>Characteristic</i> )	600 $\mu$ V 440 $\mu$ V ( <i>Characteristic</i> )
60 GHz	750 $\mu$ V 580 $\mu$ V ( <i>Characteristic</i> )	750 $\mu$ V 580 $\mu$ V ( <i>Characteristic</i> )	750 $\mu$ V 580 $\mu$ V ( <i>Characteristic</i> )
75 GHz	1 mV 780 $\mu$ V ( <i>Characteristic</i> )	1 mV 780 $\mu$ V ( <i>Characteristic</i> )	1 mV 780 $\mu$ V ( <i>Characteristic</i> )
85 GHz	—	1200 $\mu$ V 900 $\mu$ V ( <i>Characteristic</i> )	1200 $\mu$ V 900 $\mu$ V ( <i>Characteristic</i> )
100 GHz	—	—	1400 $\mu$ V 1050 $\mu$ V ( <i>Characteristic</i> )
122 GHz ( <i>Characteristic</i> )	—	—	2000 $\mu$ V ( <i>Characteristic</i> )
<b>Scale Factor (per division)</b>	<b>Description</b>		
Minimum	1 mV/division		
Maximum	100 mV/division		
<b>DC Accuracy (<math>V_{AVG}</math> Measurement)</b>	<b>Description</b>		
Specified at calibration temperature $\pm 0.5$ °C. (Perform a new module calibration if hardware skew has been applied.)	± 2 mV ( <i>Characteristic</i> )		
Specified at calibration temperature $\pm 5$ °C.	± 2 mV $\pm$ 4% of (reading – channel offset)		
DC Offset Range (referenced to center of screen)	± 500 mV		
Input Dynamic Range (relative to channel offset)	± 400 mV		

Maximum Input Signal	$\pm 2\text{ V}$ (+16 dBm)
Maximum Sample Rate	When used in an 86100D mainframe: 40 kSa/s (Characteristic). When used in an N1000A mainframe: 250 kSa/s (Characteristic)
Nominal Input Impedance	50 $\Omega$ (Characteristic)
Remote Head Cable Length	The nominal length of the remote head cables is 1270 mm as measured from the module's front panel to the remote head's casing.

Input Impedance. Graph of S11 (Characteristic)

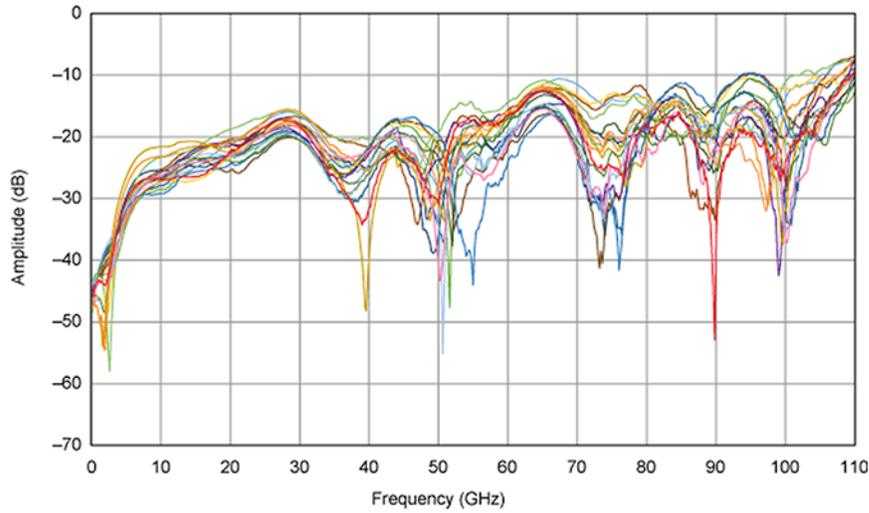

1. Tuned to be  $-3\text{ dB}$  ( $\pm$  measurement uncertainty) at stated bandwidth(s), except for 122 GHz which is tuned for highest bandwidth while keeping channel noise  $\leq 2.5\text{ mV RMS}$ .

# N1055A module specifications



## N1055A general specifications

Item	Module Options <sup>1</sup> N1055A-32F N1055A-32M	Module Options <sup>1</sup> N1055A-34F N1055A-34M	Module Options <sup>1</sup> N1055A-52F N1055A-52M	Module Options <sup>1</sup> N1055A-54F N1055A-54M
Number of Channels	2 <sup>2</sup>	4	2 <sup>2</sup>	4
Remote Head Cable Length	The nominal length of the remote head cables is 1270 mm as measured from the module's front panel to the remote head's casing.			
Electrical Input <sup>3</sup>	2.92 mm (female or male)		1.85 mm (female or male)	
Electrical Channel Bandwidth	35 GHz <sup>4, 5</sup>		35 GHz or 50 GHz <sup>5</sup>	
Receiver Transition Time (10% to 90% calculated from $T_R = 0.35/BW$ )	10 ps, characteristic		10 ps (35 GHz BW setting), characteristic 7 ps (50 GHz BW setting), characteristic	
Channel-to-Channel Skew Range	± 150 ps			
Vertical Resolution	16 bit A/D converter			
RMS Noise	600 μV, characteristic 730 μV, maximum		600 μV (35 GHz BW setting), characteristic 750 μV (50 GHz BW setting), characteristic 950 μV (50 GHz BW setting), maximum	
Scale Factor (Per Division)		Description		
Minimum	1 mV / division			
Maximum	100 mV / division			
DC Accuracy ( $V_{AVG}$ Measurement)	± 800 μV, characteristic Specified at calibration temperature ± 0.5 °C. (Perform a new module calibration if hardware skew has been applied.) ± 2 mV ± 4% of (reading–channel offset) Specified at calibration temperature ± 10 °C			
DC Offset Range (referenced from center of screen)	± 500 mV			
Input Dynamic Range (relative to channel offset)	± 400 mV			
Maximum Input Signal	+2 V / –1 V			
Nominal Impedance	50 ohm			
Maximum Sample Rate, module timebase <sup>6</sup>		Description		
Option-FS1	250 kSa/s, characteristic			
Standard	80 kSa/s, characteristic			

TDR Step Repetition Rate <sup>6</sup>	Description
Mainframe Timebase	1 kHz to 250 kHz, characteristic
Module timebase (standard)	1 kHz to 80 kHz, characteristic
Module timebase (Option FS1)	1 kHz to 250 kHz, characteristic


1. Connectors: F = female, M = male.
2. Upgradable from 2 channel to 4 channel after purchase (return to Keysight).
3. Connector style is the same on all channels and is selected at time of order.
4. Upgradable from 35 GHz to 50 GHz after purchase (return to Keysight).
5. Tuned to be -3 dB ( $\pm$  measurement uncertainty) at stated bandwidth(s) using NIST traceable swept-sine test system.
6. FlexDCA software auto-selects the mainframe or module timebase dependent on the DUT setup. In cases where the mainframe timebase is used, the maximum sample rate will be:  
 86100D Mainframe: 40 kSa/s for standard modules and modules with option-FS1, (*characteristic*).  
 N1000A Mainframe: 80 kSa/s for standard modules and 250 kSa/s for modules with option-FS1, (*characteristic*).

## TDR system specifications


Item	Module Options <sup>1</sup>	Module Options <sup>1</sup>
	N1055A-32F N1055A-32M N1055A-34F N1055A-34M	N1055A-52F N1055A-52M N1055A-54F N1055A-54M
<b>Incident TDR Step Transition Time (10 % to 90 %) <sup>2, 3</sup></b>		
<b>Description</b>		
Without TDR Calibration	< 18 ps	< 7 ps
With TDR Calibration	Adjustable from 15 ps, characteristic	Adjustable from 6 ps, characteristic
<b>Reflected TDR Step Transition Time (10% to 90%) <sup>3</sup></b>		
<b>Description</b>		
Without TDR Calibration	< 20 ps	< 11 ps
With TDR Calibration	< 18 ps	9.5 ps, characteristic
TDR Step Amplitude (Combined Oscilloscope and TDR Performance)	100 mV Setting: 0 mV to $\pm$ 100 mV 200 mV Setting: 0 mV to $\pm$ 200 mV	100 mV Setting: 0 mV to $\pm$ 100 mV 200 mV Setting: 0 mV to $\pm$ 200 mV

1. Connectors: F = female, M = male.
2. Incident TDR edge speed is defined as the transition time at the output of the remote head. It is calculated by de-convolving the receiver transition time from the measured transition time when the remote head is terminated with a short.
3. Measured on a negative TDR step, terminated in a short.

## Step flatness (graphs of combined oscilloscope and TDR performance)

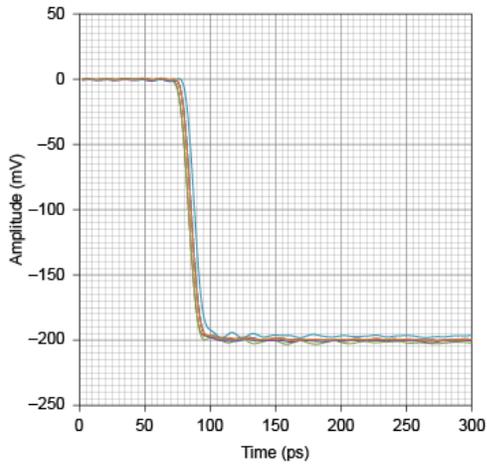


Options 52F, 52M, 54F, and 54M with TDR Calibration (Characteristic)

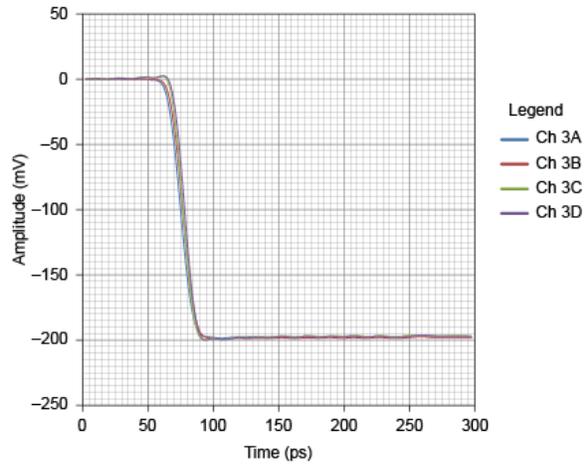


Options 32F, 32M, 34F, and 34M with TDR Calibration (Characteristic)

In the following two graphs, the blue trace shows Channel A, the red trace shows Channel B, The green trace shows Channel C, and the yellow trace shows Channel D.

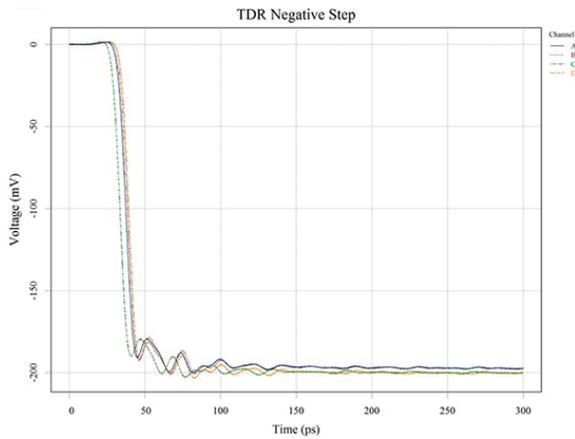

Options 52F, 52M, 54F, and 54M without TDR Calibration (Characteristic)

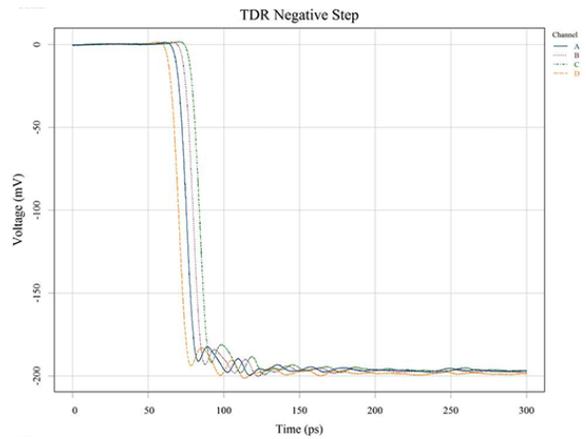


Options 32F, 32M, 34F, and 34M without TDR Calibration (Characteristic)


# N1055A performance characteristics

Apply when N1055A used with N1010300A Signal Integrity Package for FlexDCA Sampling Oscilloscope Software. Test conditions:


- Mainframe and module have been turned on for at least one hour and have been calibrated
- TDR calibration has been performed using appropriate electronic or mechanical calibration units
- Derived from measurements made on 1.85 mm verification devices that were calibrated by Keysight metrology lab
- Averages of 512 except as noted in dynamic range

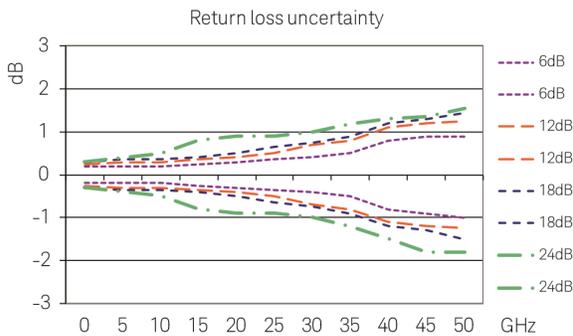


*Return Loss Uncertainty (Characteristic)*

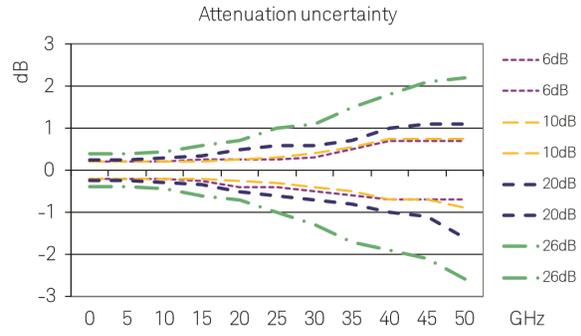

*Attenuation Uncertainty (Characteristic)*

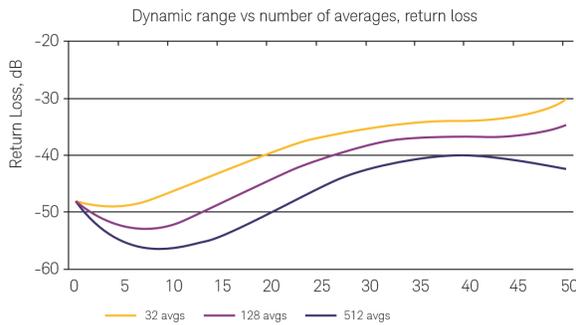

*Dynamic Range vs Number of Averages, Return Loss (Characteristic)*

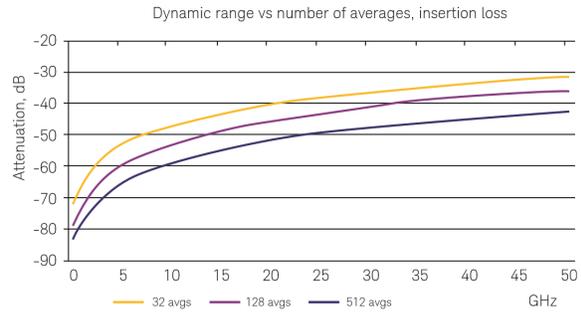

*Dynamic Range vs Number of Averages, Insertion Loss (Characteristic)*

# N1060A module specifications



## N1060A general specifications

Item	Option 050	Option 085
Bandwidth <sup>1</sup> , 3 dB (user selectable)	50 GHz	50 GHz, 70 GHz, 85 GHz, and 95 GHz ( <i>characteristic</i> )
Risetime (10% to 90%, calculated from TR = 0.35/BW)	7 ps ( <i>characteristic</i> )	4 ps ( <i>characteristic</i> )
RMS noise		Description
Characteristic	0.7 mV (50 GHz)	0.7 mV (50 GHz) 1.1 mV (75 GHz) 1.2 mV (85 GHz) 1.6 mV (95 GHz)
Maximum	1 mV (50 GHz)	1 mV (50 GHz) 1.3 mV (75 GHz) 1.6 mV (85 GHz) 2.0 mV (95 GHz)
Scale Factor (per division)		Description
Minimum		1 mV/division
Maximum		140 mV/division
DC Accuracy (V <sub>AVG</sub> Measurement)		Description
Specified at calibration temperature ± 0.5 °C. (Perform a new module calibration if hardware skew has been applied.)		± 2 mV ( <i>Characteristic</i> )
Specified at calibration temperature ± 5 °C.		± 2 mV ± 4% of (reading - channel offset)
DC offset range (referenced from center of screen)		± 560 mV
Input dynamic range (relative to channel offset)		± 560 mV
Maximum input signal		± 1V (+10 dBm)

Random Jitter (clock recovery without precision timebase active)	Description
N1000A-LOJ	< 200 fs (characteristic) at 10.3 GHz, 26.56 GHz.
N1000A-STD	< 400 fs (characteristic) at 10.3 GHz, 26.56 GHz.
Random jitter (clock recovery and precision timebase configuration) <sup>2</sup>	< 80 fs ( $\geq 10$ GHz) 45 fs (characteristic) at 26.56 GHz 60 fs (characteristic) at 10.3 GHz
Random jitter (external trigger signal applied to precision timebase input) <sup>3</sup>	< 80 fs ( $\geq 10$ GHz) 45 fs (characteristic) at 26.56 GHz 60 fs (characteristic) at 10.3 GHz
Precision timebase reference input frequency range	2.4 to 32 GHz
Precision timebase reference input amplitude (recommended for optimal jitter performance)	1.0 to 1.6 Vpp (characteristic)
Precision timebase input signal type (The precision timebase performs optimally with a sinusoidal input. Non-sinusoidal signals will operate with some degradation in timebase linearity.)	Sinusoid
Precision timebase maximum input level	$\pm 2$ V (16 dBm)
Precision timebase nominal input impedance	50 ohm
Precision timebase connector type	2.92 mm male
Channel nominal impedance	50 ohm
Electrical Input	1 mm (male) <sup>4</sup>
Channel-to-channel skew range	$\pm 100$ ps
Effective trigger-to-sample delay (clock recovery and precision timebase configuration)	< 350 ps (characteristic)

1. Tuned to be  $-3$  dB ( $\pm$  measurement uncertainty) at stated bandwidths, except for 95 GHz which is tuned for highest bandwidth while keeping channel noise  $\leq 2$  mV RMS.
2. Verified with input signal 1 Vpp @ 10 GHz and 26.56 GHz with 50 GHz channel BW.
3. Verified with input signal 1 Vpp @ 10 GHz, 0.8 Vpp @ 26.56 GHz with 50 GHz channel BW,  $\sim 1$  Vpp to PTB input.
4. Ships with ruggedized 1.0 mm (f) to 1.85 mm (f) adaptors.

## Input impedance specifications

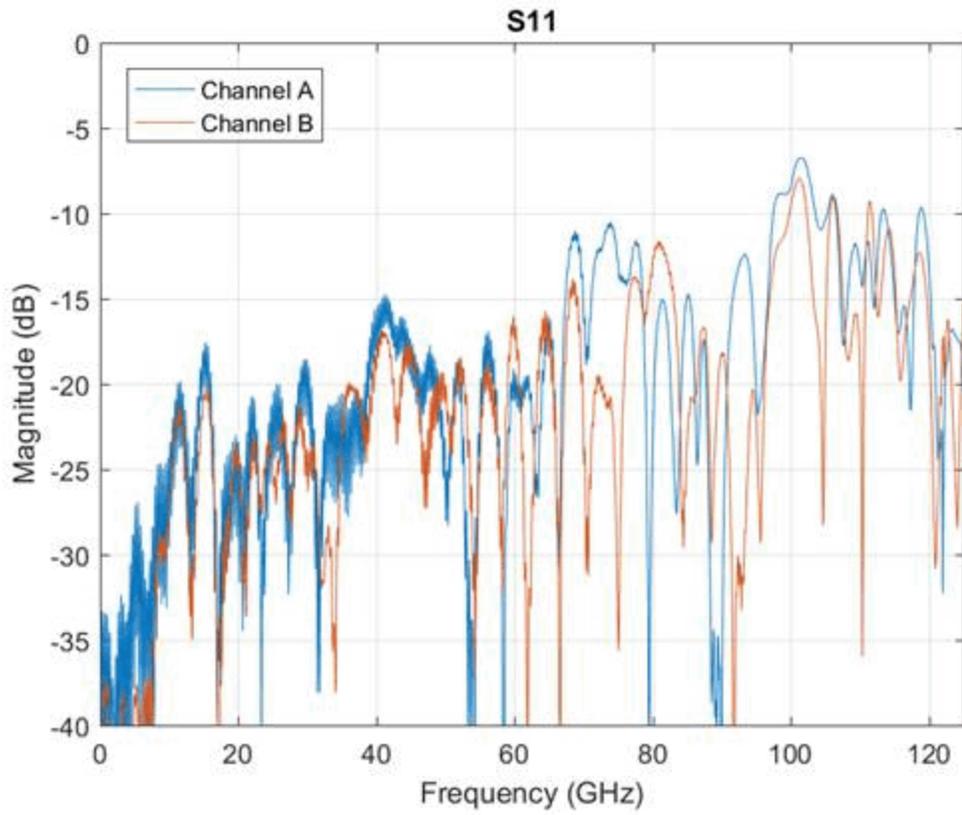


Figure 2. Graph of S11 (*characteristic*)

## N1060A clock recovery specifications

Item	Option 216	Option 232	Option 264
Data rates input range	125 MBd to 16 GBd <i>125 MBd to 16.4 GBd (characteristic)</i>	125 MBd to 32 GBd <i>125 MBd to 32.8 GBd (characteristic)</i>	125 MBd to 64 GBd <i>125 MBd to 65.8 GBd (characteristic)</i>
Clock frequency input range	62.5 MHz to 8 GHz <i>62.5 MHz to 8.2 GHz (characteristic)</i>	62.5 MHz to 16 GHz <i>62.5 MHz to 16.4 GHz (characteristic)</i>	62.5 MHz to 32 GHz <i>62.5 MHz to 32.8 GHz (characteristic)</i>
Minimum input level to acquire lock (NRZ and PAM4, single-ended, open eye)	100 mVpp <i>30 mVpp at 10.3125 GBd (characteristic)</i>	100 mVpp <i>30 mVpp at 10.3125 GBd (characteristic)</i> <i>30 mVpp at 26.56 GBd (characteristic)</i>	100 mVpp (rate $\leq$ 53.125 GBd) 200 mVpp (rate $>$ 53.125 GBd) <i>30 mVpp at 10.3125 GBd (characteristic)</i> <i>30 mVpp at 26.56 GBd (characteristic)</i> <i>60 mVpp at 53.125 GBd (characteristic)</i> <i>60 mVpp at 56 GBd (characteristic)</i> <i>100 mVpp at 64 GBd (characteristic)</i>
Minimum input level to acquire lock (PAM4, single-ended, closed eye)	N/A	<i>200 mVpp at 26.56 GBd with 20 dB channel loss at 13.28 GHz (characteristic)</i>	<i>200 mVpp at 26.56 GBd with 20 dB channel loss at 13.28 GHz (characteristic)</i>  <i>200 mVpp at 53.125 GBd with 16 dB channel loss at 26.56 GHz (characteristic)</i>
Recovered clock random jitter <sup>1</sup>	300 fs maximum $\geq$ 2.5 GHz <i>120 fs at 10.3 GHz (characteristic)</i>	300 fs maximum $\geq$ 2.5 GHz <i>80 fs at 26.56 GHz (characteristic)</i> <i>120 fs at 10.3 GHz (characteristic)</i>	
Clock recovery adjustable loop bandwidth range (user selectable)	0.015 to 20 MHz (depends on Baud Rate)		
Clock recovery loop peaking range	Up to 4 settings (dependent on loop BW)		
Loop bandwidth accuracy <sup>2, 3</sup>	$\pm 30\%$ , (characteristic, NRZ)		
Tracking range (includes spread-spectrum tracking)	$\pm 2500$ ppm ( $\pm 0.25\%$ ), (characteristic, NRZ)		
Acquisition range		Description	
Standard signals:	$\pm 300$ ppm, (characteristic)		
Spread spectrum signals:	$\pm 5000$ ppm, (characteristic, NRZ)		
Maximum consecutive identical digits to lock	150 (characteristic)		
Auto relocking	Yes (user enabled)		

Jitter Spectrum Analysis (Option JSA)		Description	
Phase noise accuracy	± 30% ( <i>characteristic, NRZ</i> )		
Clock Recovery Emulation (CRE) Operating Range (Valid for open-eye signals)	1 — 58 GBd ( <i>NRZ</i> ) ( <i>characteristic</i> )		
	1 — 31 GBd ( <i>PAM4</i> ) ( <i>characteristic</i> )		
Front panel recovered clock amp- litude	≥ 200 mVpp 450 mV at 5 GHz ( <i>characteristic</i> )	≥ 200 mVpp 450 mV at 5 GHz ( <i>char- acteristic</i> ) 275 mV at 26.56 GHz ( <i>char- acteristic</i> )	≥ 200 mVpp 450 mV at 5 GHz ( <i>characteristic</i> ) 275 mV at 26.56 GHz ( <i>char- acteristic</i> )
Front panel recovered clock divide ratio (user selectable)	1, 2, 4, 8, 16, 32		
Recovered clock front panel con- nector type	2.92 mm (m)		
Internal frequency counter accur- acy	± 10 ppm 4 ppm ( <i>characteristic</i> )		

1. Verified by connecting a sinewave to N1060A Channel A, then measuring Recovered Clock signal connected to Channel B (PTB enabled).
2. PLL bandwidth is calibrated and verified using a clean NRZ, PRBS13 signal.
3. Actual PLL bandwidth may vary due to several factors, including pattern characteristics (low/high transition density), signaling format (PAM4), and signal quality (closed eyes).

# Modules no longer available but supported by the N1000A DCA-X Mainframe

- N1045A 60 GHz Electrical
- 54752A 50 GHz Dual Channel Electrical
- 54754A Differential TDR/TDT
- 83484A Dual Channel 50 GHz Electrical
- 83496A Optical/Electrical Clock Recovery, 50 Mb/s-7.1 Gb/s
- 83496B Optical/Electrical Clock Recovery with Phase Noise Analysis
- 86112A Dual Channel 20 GHz Electrical
- 86105C Optical/Electrical Channel
- 86105D Optical/Electrical Channel
- 86107A Precision Timebase Reference
- 86108A Precision Waveform Analyzer
- 86108B Precision Waveform Analyzer
- 86115D Dual Channel Optical
- 86116C Optical/Electrical Channel
- 86117A 50 GHz Dual Channel Electrical
- 86118A Dual 70 GHz remote sampling head

# Ordering Information

The following tables offer helpful information about the DCA-X software, mainframe and plug-in modules and their options but are not intended to serve as a configuration guide.

When configuring a solution, please also refer to the following helpful documents:

- Keysight DCA Wide-Bandwidth Oscilloscope Family Configuration Guide (5992-3372EN)
- Keysight DCA Family FlexDCA Sampling Oscilloscope Software Technical Overview (5992-3319EN)
- Keysight DCA Family Clock Data Recovery Solutions Data Sheet (5992-1620EN)

## N1000A DCA-X

### N1000A DCA-X hardware options

<b>Model/Option Number</b>	<b>Description</b>
N1000A	Infiniium DCA-X mainframe
N1000A-PLK	Pattern Lock
N1000A-STB	Standard timebase
N1000A-LOJ	Low jitter timebase
N1000A-PTB	Precision timebase integrated in the mainframe
N1000A-GPI	GPIB card installed (mandatory option)

### N1000A miscellaneous options

<b>Model/Option Number</b>	<b>Description</b>
N1000A-AFP	Module slot filler panel
N1000A-AX4	Rack mount flange kit
N1000A-AXE	Rack mount flange kit with handles
N1000A-UK6	Commercial calibration certificate with test data

## N1000A DCA-X hardware upgrade options (if you already own an N1000A)

<b>Model/Option Number</b>	<b>Description</b>
N1000AU-PLK	Add Pattern Lock
N1000AU-LOJ	Add low jitter timebase
N1000AU-PTB	Add precision timebase integrated in the mainframe

## FlexDCA software packages

<b>Model Number</b>	<b>Description</b>
N1010100A	Research and Development Package for FlexDCA
N1010200A	Manufacturing Package for FlexDCA
N1010300A	Signal Integrity Package for FlexDCA

# Application software

See the application software datasheet to confirm hardware requirements.

<b>SW Application Model</b>	<b>SW Application Description</b>
N109228CA	Electrical TX Test SW for OIF-CEI-3.1
N109310CA	Electrical TX Test SW for SFF-8431 (SFP+)
D9010UDAA	User Defined Application Software (for DCA-X and RT Scopes)
N1091APCA	Electrical TX Test SW for IEEE 802.3ap/bj (10G/40G)
N1091BMCA	Electrical TX Test SW for IEEE 802.3bm
N1091BACA	Electrical TX Test SW for IEEE 802.3ba (40G/100G)
N1091BJCA	Electrical TX Test SW for IEEE 802.3bj (100G)
N1091BSCB	Electrical TX Test SW for IEEE 802.3bs/cd
N1091CKCA	Electrical TX Test SW for IEEE 802.3ck
N109212CA	Electrical TX Test SW for OIF-CEI-112G
N109256CB	Electrical TX Test SW for OIF-CEI-4.0
N1095BSCA	Optical TX Test SW for IEEE 802.3bs/cd/cu
N1094BS1A	PAM4 Measurement Software Development Kit.

## Optical/electrical modules

Module/Option	Description
N1030A	Single 65 GHz optical channel, 9/125 $\mu\text{m}$ fiber input
N1030A-280	Hardware filters for 25-28 NRZ Gbaud rates
N1030A-490	Hardware filter for 49.77 NRZ Gbaud ITU-T G.hsp (PON) rate
N1030A-560	Hardware filters for 53-56 Gbaud rates
N1030A-65U	65 GHz unamplified optical channel
N1030A-EC1	Add 95 GHz single electrical channel
N1030A-IRC	Impulse response correction (optical and electrical channels)
N1030B	Two 65 GHz optical channels, 9/125 $\mu\text{m}$ fiber input
N1030B-280	Hardware filters for 25-28 NRZ Gbaud rates
N1030B-490	Hardware filter for 49.77 NRZ Gbaud ITU-T G.hsp (PON) rate
N1030B-560	Hardware filters for 53-56 Gbaud rates
N1030B-65U	65 GHz unamplified optical channel
N1030B-IRC	Impulse response correction
N1032A	Single 120 GHz optical channel, 9/125 $\mu\text{m}$ fiber input
N1032A-09U	90 GHz unamplified optical channel
N1032A-13U	120 GHz unamplified optical channel
N1032A-112	Hardware filters for standards based rates
N1032A-IRC	Impulse response correction
N1032B	Two 120 GHz optical channels, 9/125 $\mu\text{m}$ fiber input
N1032B-09U	90 GHz unamplified optical channel
N1032B-13U	120 GHz unamplified optical channel
N1032B-112	Hardware filters for standards based rates
N1032B-IRC	Impulse response correction

## Dual/quad electrical channel modules

Module/Option	Description
N1040A-033	Two 33 GHz electrical channels
N1040A-060	Two 60 GHz electrical channels
N1045B	2/4 port 60 GHz electrical remote head
N1045B-02F	2 channel remote head, 1.85 mm, female
N1045B-02M	2 channel remote head, 1.85 mm, male
N1045B-04F	4 channel remote head, 1.85 mm, female
N1045B-04M	4 channel remote head, 1.85 mm, male
N1046A	100 GHz, 1/2/4 port electrical remote sampling head
N1046A-71F	1 channel, 75 GHz remote head, 1 mm, female
N1046A-81F	1 channel, 85 GHz remote head, 1 mm, female
N1046A-11F	1 channel, 100 GHz remote head, 1 mm, female
N1046A-72F	2 channel, 75 GHz remote head, 1 mm, female
N1046A-82F	2 channel, 85 GHz remote head, 1 mm, female
N1046A-12F	2 channel, 100 GHz remote head, 1 mm, female
N1046A-74F	4 channel, 75 GHz remote head, 1 mm, female
N1046A-84F	4 channel, 85 GHz remote head, 1 mm, female
N1046A-14F	4 channel, 100 GHz remote head, 1 mm, female

## TDR/TDT modules

Module/Option	Description
N1055A <sup>1</sup>	35/50 GHz, 2/4 port, TDR/TDT remote head
N1055A-FS1	Fast sampling, mandatory option
N1055A-32F	35 GHz, 2 channel remote head, 2.92 mm, female
N1055A-32M	35 GHz, 2 channel remote head, 2.92 mm, male
N1055A-34F	35 GHz, 4 channel remote head, 2.92 mm, female
N1055A-34M	35 GHz, 4 channel remote head, 2.92 mm, male
N1055A-52F	50 GHz, 2 channel remote head, 1.85 mm, female
N1055A-52M	50 GHz, 2 channel remote head, 1.85 mm, male
N1055A-54F	50 GHz, 4 channel remote head, 1.85 mm, female
N1055A-54M	50 GHz, 4 channel remote head, 1.85 mm, male

1. When used in an 86100D, 86100D option ETR is recommended if more than one TDR module is connected to the same DUT

## Precision waveform analyzer modules

Module/Option	Description
N1060A-050 <sup>1</sup>	Dual 50 GHz electrical channels
N1060A-085 <sup>1</sup>	Dual 85 GHz electrical channels
N1060A-216	Clock recovery 125 MBd to 16 GBd
N1060A-232	Clock recovery 125 MBd to 32 GBd
N1060A-264	Clock recovery 125 MBd to 64 GBd
N1060A-PTB	Integrated precision timebase (mandatory option <sup>2</sup> )
N1060A-E33	Integrated hardware filters for 33 GHz, 40 GHz, and 43 GHz
N1060A-EVA	Integrated variable equalizers in clock path (mandatory option <sup>2</sup> )
N1060A-JSA	Jitter Spectrum Analysis (mandatory option <sup>2</sup> )
N1060A-A1F	Two 1 mm (f) to 1 mm (f) adapters
N1060A-A1M	Two 1 mm (m) to 1 mm (m) adapters
N1060A-A1X	Two 1 mm (m) to 1 mm (f) adapters
N1060A-CA1	Cable pair, 1 mm (m) to 1 mm (f), 160 mm length
N1060A-CA2	Matched cable pair, 2.4 mm (m) to 2.4 mm (m), 24 inch length
N1060A-DC2	Two DC blocks, 2.4 mm connectors, 16V, 50 kHz to 50 GHz
N1060AU-085	Upgrade to Option 085 Performance
N1060AU-264	Upgrade to Option 264
N1060AU-232	Upgrade to Option 232

1. 86100D option ETR recommended when used in an 86100D mainframe, N1000A option PLK recommended when used in an N1000A mainframe
2. Mandatory options are automatically provided with the product and cannot be unselected.

# External clock recovery solutions

## N1076B electrical clock recovery

Module/Option	Description
N1076B-216	Clock recovery range: 125 MBd to 16 GBd
N1076B-232	Clock recovery range: 125 MBd to 32 GBd
N1076B-264	Clock recovery range: 125 MBd to 64 GBd (56 GBd for PAM4 signals)
N1076B-EVA	Integrated variable equalizers (mandatory option <sup>1</sup> )
N1076B-JSA	Jitter Spectrum Analysis

1. Mandatory options are automatically provided with the product and cannot be unselected.

## N1077A optical/electrical clock recovery

Module/Option	Description
N1077A-216	Clock recovery range: 50 MBd to 16 GBd
N1077A-232	Clock recovery range: 50 MBd to 32 GBd
N1077A-SMS	Internal SM and MM splitters
N1077A-SXT	No supplied splitter (standard option). External splitter must be supplied by user.
N1077A-JSA	Jitter spectrum analysis

## N1077B optical/electrical clock recovery

Module/Option	Description
N1077B-216	Clock recovery range: 125 MBd to 16 GBd
N1077B-225	Clock recovery range: 24 to 29 GBd
N1077B-232	Clock recovery range: 125 MBd to 32 GBd
N1077B-253	Clock recovery range: 48 to 58 GBd
N1077B-264	Clock recovery range: 125 MBd to 64 GBd
N1077B-SMM	Internal 70/30 multimode optical splitter
N1077B-SXT	No supplied splitter (standard option). External splitter must be supplied by user
N1077B-EVA	Integrated variable equalizers in electrical input path (mandatory option <sup>1</sup> )
N1077B-JSA	Jitter spectrum analysis

## N1078A optical/electrical clock recovery

Module/Option	Description
N1078A-216	Clock recovery range: 125 MBd to 16 GBd
N1078A-225	Clock recovery range: 25 to 29 GBd
N1078A-232	Clock recovery range: 125 MBd to 32 GBd
N1078A-253	Clock recovery range: 53 to 58 GBd
N1078A-264	Clock recovery range: 125 MBd to 64 GBd
N1078A-S50	Internal 50-50 SM optical splitter
N1078A-SXT	No supplied splitter (standard option). External splitter must be supplied by user.

N1078A-JSA	Jitter spectrum analysis
N1078A-EVA	Integrated variable equalizers in electrical input path (mandatory option <sup>1</sup> )

1. Mandatory options are automatically provided with the product and cannot be unselected.

# Warranty Options (for All Products)

Warranty	Description
R1280A	Customer return repair service
R1282A	Customer return calibration service

## Accessories

See the *DCA Accessories Guide* for available accessories (5991-2340EN).

## Connectivity Solutions

For a wide range of test adapters to connect to one or more lanes for SFP+, QSFP+, fibre channel, PCIe and many others, please see adapters information from Wilder Technologies at:

<http://www.wilder-tech.com/>. Call Keysight for connectivity and probing solutions not listed above.

For more information on Keysight Technologies' products, applications, or services, please visit: [www.keysight.com](http://www.keysight.com)



This information is subject to change without notice. © Keysight Technologies, 2018 - 2022, Published in USA, September 28, 2022, 5992-3271EN